PRODUCT CATALOGUE

—TYPE B GAS VENT—
MODEL BV

Venting Solution for Gas appliances

3" to 8" DIAMETER

SELKIRK®

LIFETIME WARRANTY — The Smart Choice

Model BV - B Vent Table of Contents

- **LENGTHS:** (Fixed & Adjustable) . . . . . Page 2
- **ELBOWS & TEES:** (45⁰ & 90⁰ Elbows, Tees-Standard & Reduction, "Y" Tees- Standard & Reduction & Tee Cap) . . . . . Page 3
- **SUPPORTS:** (Support Assemblies & Wall Band) . . . . . Page 4
- **FLASHINGS & STORM COLLAR:** (Adjustable, Steep Roof, Tall Cone, Ventilated & Storm Collar) . . . . . Page 4 & 5
- **MISCELLANEOUS COMPONENTS:** . . . . . Page 6 & 7
- **DOUBLE WALL FLEX CONNECTORS:** . . . . . Page 7
- **TYPICAL INSTALLATIONS:** . . . . . Page 7
- **WARRANTY:** . . . . . Page 8

Model BV - B Vent Features and Benefits

- 1/2" air-space.
- Aluminum inner liner
- Galvalume outer casing.
- 1" clearance to combustibles.
- Approved for exterior use (must be enclosed up to roof line).
- Twist-Lock coupler for easy assembly/disassembly.
- Where screws are recommended, use 3/8" sheet metal screws.
- Listed to ULC S-605 and UL441

Minimum Distances above Roof Line Chart*	
Roof Pitch	**Min. Dist. above Roof Line**
Flat to 9/12 pitch	24"
9/12 to 10/12 pitch	32"
10/12 to 11/12 pitch	39"
11/12 to 12/12 pitch	46"
12/12 to 14/12 pitch	60"
14/12 to 16/12 pitch	75"
16/12 to 18/12 pitch	90"

***refer to installation instructions for additional information**

Lengths

For installed length, subtract 1" per joint.

FIXED LENGTHS

- Available in Lengths of 6", 12", 18", 24", 36" and 60".

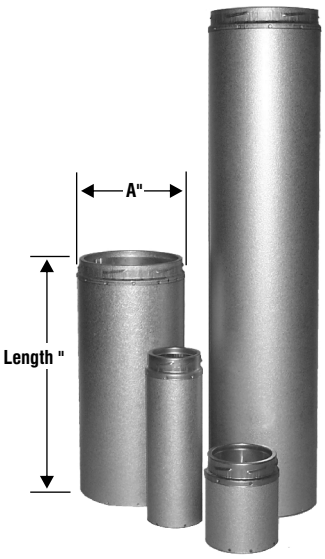

Size	Product Code	A	Length
3"	BV306	4	6
	BV312	4	12
	BV318	4	18
	BV336	4	36
	BV360	4	60

Size	Product Code	A	Length
5"	BV506	6	6
	BV512	6	12
	BV518	6	18
	BV536	6	36
	BV560	6	60

Size	Product Code	A	Length
7"	BV706	8	6
	BV712	8	12
	BV718	8	18
	BV736	8	36
	BV760	8	60

Size	Product Code	A	Length
4"	BV406	5	6
	BV412	5	12
	BV418	5	18
	BV436	5	36
	BV460	5	60

Size	Product Code	A	Length
6"	BV606	7	6
	BV612	7	12
	BV618	7	18
	BV636	7	36
	BV660	7	60

Size	Product Code	A	Length
8"	BV806	10	6
	BV818	10	18
	BV824	10	24
	BV836	10	36
	BV860	10	60

ADJUSTABLE LENGTHS

- Used to adjust pipe to desired length.
- Simply slides over another pipe length (Note: do not use over an Elbow or Tee)
- Available in 6" & 12" adjustable lengths.
- Includes Pipe Clamp.



Size	Product Code	A	Length
3"	BV306ADJ	4	6
	BV312ADJ	4	12

Size	Product Code	A	Length
5"	BV506ADJ	6	6
	BV512ADJ	6	12

Size	Product Code	A	Length
7"	BV706ADJ	8	6
	BV712ADJ	8	12

Size	Product Code	A	Length
4"	BV406ADJ	5	6
	BV412ADJ	5	12

Size	Product Code	A	Length
6"	BV606ADJ	7	6
	BV612ADJ	7	12

Size	Product Code	A	Length
8"	BV812ADJ	10	12

45 DEGREE ELBOW



- Used to offset pipe around construction obstacles.
- Three piece adjustable elbow twists for easy offsets.

Size	Prod. Code	A	B	C
3"	BV345	4	3-1/2	2-1/2
4"	BV445	5	3-1/4	2-1/2
5"	BV545	6	3-1/4	2-1/2
6"	BV645	7	3	3-1/4
7"	BV745	8	4-1/2	3
8"	BV845	10	5	5

90 DEGREE ELBOW



- Used to orient pipe between vertical and horizontal orientation.
- Four piece adjustable elbow twists for easy offsets.

Size	Prod. Code	A	B	C
3"	BV390	4	4-1/2	3-1/2
4"	BV490	5	5	4-3/4
5"	BV590	6	6	5
6"	BV690	7	6-1/4	6-1/4
7"	BV790	8	7-3/4	7
8"	BV890	10	10	9-1/2

STANDARD & REDUCTION TEES





- Used to transition system from horizontal to vertical orientation.
- Provides easy access for inspection and maintenance.
- Tee Cap sold separately.

STANDARD

Size	Prod. Code	A	B	C
3"	BV3T	4	5-1/2	2
4"	BV4T	5	5-1/2	2
5"	BV5T	6	5-1/2	2
6"	BV6T	7	5-1/2	2
7"	BV7T	8	5-1/2	2
8"	BV8T	10	10	2

REDUCTION

Size	Prod. Code	A	B	C
4"	BV43T	5	4	2
5"	BV54T	6	5	2

STANDARD & REDUCTION "Y" TEES



- Used to transition system from horizontal to vertical orientation.
- Provides better flue gas flow than a traditional Tee.
- Tee Cap sold separately.

STANDARD

Size	Prod. Code	A	B	C
3"	BV3YT	4	4	12
4"	BV4YT	5	5	12
5"	BV5YT	6	6	12
6"	BV6YT	7	7	12
7"	BV7YT	8	8	12
8"	BV8YT	10	10	24

REDUCTION

Size	Prod. Code	A	B	C
4"	BV43YT	5	4	12
5"	BV54YT	6	5	12
6"	BV64YT	7	5	12

TEE CAP



- Used at bottom of Tee
- Removable, for easy system maintenance

Size	Prod. Code	A	B
3"	BV3TC	3	4
4"	BV4TC	4	5
5"	BV5TC	5	6
6"	BV6TC	6	7
7"	BV7TC	7	8
8"	BV8TC	8	10

Supports

SUPPORT ASSEMBLY



- Used to support pipe from the ceiling joist.
- Supports up to 60' of pipe.
- Centres pipe between floors and maintains 1" air-space clearance.
- Installed above the joist.
- Collar is pre-attached to support plate.

Size	Prod. Code	A	B	C
3"	BV3SA	4-1/8	10	10
4"	BV4SA	5-1/8	11	11

Size	Prod. Code	A	B	C
5"	BV5SA	6-1/8	12	12
6"	BV6SA	7-1/8	13	13

Size	Prod. Code	A	B	C
7"	BV7SA	8-1/8	14	14
8"	BV8SA	10-1/8	16	16

WALL BAND



- Used to stabilize the pipe against an outside wall.
- Must be installed just above the Tee and every 6' thereafter.

Size	Prod. Code	A	B
3"	BV3WB	4	9
4"	BV4WB	5	10

Size	Prod. Code	A	B
5"	BV5WB	6	12
6"	BV6WB	7	13

Size	Prod. Code	A	B
7"	BV7WB	8	14
8"	BV8WB	10	22

Flashings & Storm Collar

ADJUSTABLE ROOF FLASHING



- Used to waterproof installations that penetrate the roof line.
- Adjustable for 0/12 - 6/12 roof pitches
- Storm Collar not included.

Size	Prod. Code	A	B	C
3"	BV3ARF	4	18	18
4"	BV4ARF	5	18	18

Size	Prod. Code	A	B	C
5"	BV5ARF	6	20	20
6"	BV6ARF	7	20	20

Size	Prod. Code	A	B	C
7"	BV7ARF	8	20	20
8"	BV8ARF	10	22	22

STEEP ROOF FLASHING



- Used to waterproof installations that penetrate the roof line of a steep roof.
- Adjustable for 7/12 to 12/12 pitch roofs.
- Storm Collar not included.

Size	Prod. Code	A	B	C
3"	BV3SRF	4	18	18
4"	BV4SRF	5	18	18

Size	Prod. Code	A	B	C
5"	BV5SRF	6	22	22
6"	BV6SRF	7	24	24

Size	Prod. Code	A	B	C
7"	BV7SRF	8	24	24
8"	BV8SRF	10	30	30

TALL CONE FLASHING



- Used to waterproof installations through a flat roof.
- Storm Collar not included.

Size	Prod. Code	A	B	C
3"	BV3TCF	4	7	18
4"	BV4TCF	5	8	18
5"	BV5TCF	6	9	20
6"	BV6TCF	7	10	20
7"	BV7TCF	8	11	20
8"	BV8TCF	10	12	21

VENTILATED ADJUSTABLE ROOF FLASHING



- Used to waterproof installations that penetrate the roof line.
- Adjustable for 0/12 - 6/12 roof pitches
- Storm Collar not included.

Size	Prod. Code	A	B	C
3"	BV3VAF	5	10	18
4"	BV4VAF	6	10	18
5"	BV5VAF	7	12	20
6"	BV6VAF	8	12	20
7"	BV7VAF	9	13	21
8"	BV8VAF	10	13	22

VENTILATED STEEP ROOF FLASHING



- Used to waterproof installations that penetrate the roof line of a steep roof.
- Storm Collar not included.

Size	Prod. Code	A	B
3"	BV3VSF	5	18
4"	BV4VSF	6	22
5"	BV5VSF	7	24
6"	BV6VSF	8	24
7"	BV7VSF	9	26
8"	BV8VSF	10	30

VENTILATED TALL FLASHING



- Used to waterproof installations through a flat roof.
- Storm Collar not included.

Size	Prod. Code	A	B
3"	BV3VTF	5	8
4"	BV4VTF	6	9
5"	BV5VTF	7	10
6"	BV6VTF	8	11
7"	BV7VTF	9	12
8"	BV8VTF	10	13

STORM COLLAR



- Used to provide a weather proof seal to pipe above roof line.
- Seal inner edge with hi-temp silicone sealant.

Size	Prod. Code	A	B
3"	BV3SC	4	8
4"	BV4SC	5	9
5"	BV5SC	6	10
6"	BV6SC	7	11
7"	BV7SC	8	12
8"	BV8SC	10	14

INCREASER

- Used to transition system from smaller to larger diameter pipe.

Size	Prod. Code	A	B
3"	BV34IN	4	5
3"	BV35IN	4	6
3"	BV36IN	4	7
3"	BV37IN	4	8
4"	BV45IN	5	6
4"	BV46IN	5	7
4"	BV47IN	5	8
5"	BV56IN	6	7
5"	BV57IN	6	8
6"	BV67IN	7	8
7"	BV78IN	8	9
8"	BV810IN	10	12

4" to 5" SHORT INCREASER



- Used to transition system from 4” to 5” diameter pipe.

Size	Prod. Code	A	B
5"	BV45INS	5	4

RAIN CAP



- Designed to prevent rain & snow from entering the pipe.
- Twist lock coupler design.

Size	Prod. Code	A	B
3"	BV3RC	4	8
4"	BV4RC	5	9
5"	BV5RC	6	10
6"	BV6RC	7	11
7"	BV7RC	8	12
8"	BV8RC	14-1/4	7

DRAFT HOOD CONNECTOR



- Connects C Vent to B Vent.
- Used to connect pipe to draft hood at appliance.

Size	Prod. Code	A	B	C
3"	BV3DHC	3	4	6
4"	BV4DHC	4	5	6
5"	BV5DHC	5	6	6
6"	BV6DHC	6	7	6
7"	BV7DHC	7	8	6
8"	BV8DHC	8	10	6

REVERSE DRAFT HOOD CONNECTOR



- Connects B Vent to C Vent.
- Used to connect pipe to Single Wall

Size	Prod. Code	A	B	C
3"	BV3DHCR	3	4	6
4"	BV4DHCR	4	5	6
5"	BV5DHCR	5	6	6
6"	BV6DHCR	6	7	6
7"	BV7DHCR	7	8	6
8"	BV8DHCR	8	10	7

FIRESTOP SPACER



- Used to protect combustible materials where the pipe passes through a ceiling or wall.
- Can be installed above or below joist.

Size	Prod. Code	A	B
3"	BV3FS	4-1/8	8
4"	BV4FS	5-1/8	9
5"	BV5FS	6-1/8	10
6"	BV6FS	7-1/8	11
7"	BV7FS	8-1/8	12

Miscellaneous Components

UNIVERSAL ADAPTORS for 1/4" WALL

- Used to connect B Vent to/from 1/4" Type B Gas Vent.

MALE ADAPTOR

Size	Prod. Code	A	B
3"	BV3UAMQ	3-1/2	4
4"	BV4UAMQ	4-1/2	5

Size	Prod. Code	A	B
5"	BV5UAMQ	5-1/2	6
6"	BV6UAMQ	6-1/2	7

Size	Prod. Code	A	B
7"	BV7UAMQ	7-1/2	8

FEMALE ADAPTOR

Size	Prod. Code	A	B
3"	BV3UAFQ	4	3-1/2
4"	BV4UAFQ	5	4-1/2

Size	Prod. Code	A	B
5"	BV5UAFQ	6	5-1/2
6"	BV6UAFQ	7	6-1/2

Size	Prod. Code	A	B
7"	BV7UAFQ	8	7-1/2

Double Wall Flex Connectors

DOUBLE WALL GAS FLEX CONNECTORS

Available in
2, 3, 4, & 5 ft. lengths

- Used to connect gas appliance to Type B Gas Vent.
- Eliminates the need to use elbows.

Size	Prod. Code	Length
3"	1730022	2 ft.
4"	1740022	2 ft.
5"	1750022	2 ft.

Size	Prod. Code	Length
3"	1730033	3 ft.
4"	1740033	3 ft.
5"	1750033	3 ft.

Size	Prod. Code	Length
3"	1730044	4 ft.
4"	1740044	4 ft.
5"	1750044	4 ft.

Size	Prod. Code	Length
3"	1730055	5 ft.
4"	1740055	5 ft.
5"	1750055	5 ft.

Typical Installations

INTERIOR INSTALLATION

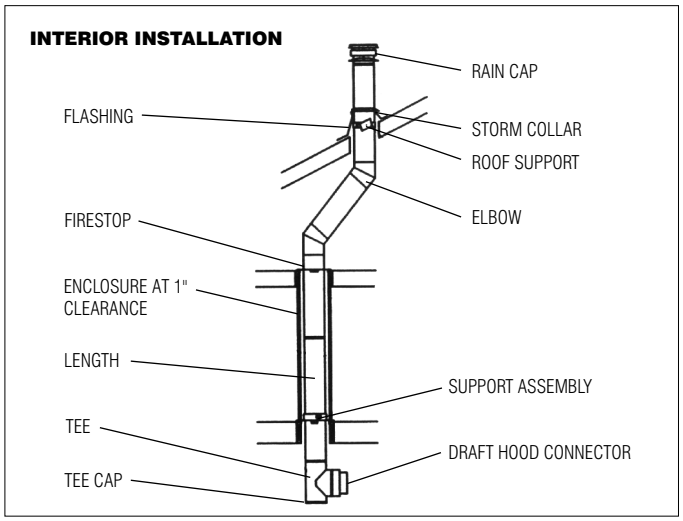

EXTERIOR INSTALLATION

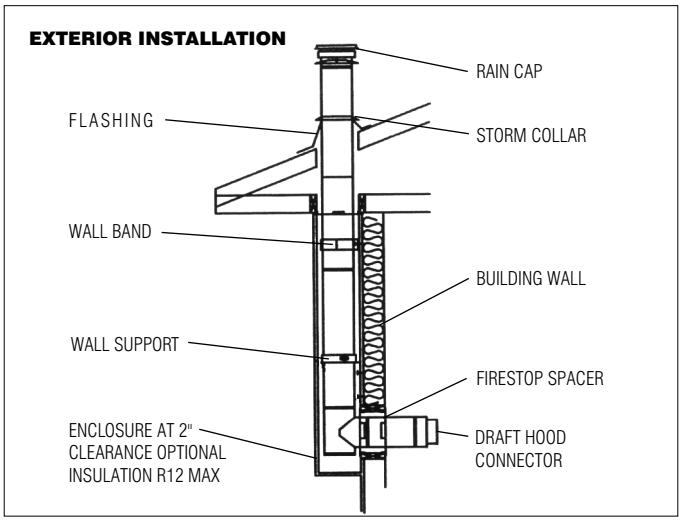

Selkirk Canada Corporation
P.O. Box 526, Depot 1
Hamilton, ON L8L 7X6
Toll Free: 1.888.SELKIRK (735.5475)
info@selkirkcanada.com

www.selkirkcorp.com

Selkirk Corporation
5030 Corporate Exchange Blvd. SE
Grand Rapids, MI 49512
Toll Free: 1.800.433.6341
info@selkirkcorp.com

BVS001-E-R&B 3244-4594 11/15